

Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Subag Hospital Latrines

Project Location: Subag / Butana Locality

GPS: N 15° 17' 52.57" E 34° 48' 11.58"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors				
1.1	Rehabilitation of doors Doors size (90cm * 2m) with oil painting of all doors both sides	No	4		
2	Plastering				
2.1	Internal Plastering for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	15		
3	Painting				
3.1	Internal Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	76		
4	Sing post				
4.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Subag locality Latrines

Project Location: Subag / Butana Locality

GPS: N 15° 17' 23.49" E 34° 48' 19.7"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors & floor				
1.1	Supply and install new doors with 20cm mesh on the top of the door for lighting. Door size (80cm * 1.8m) with oil painting of all doors both sides	No	2		
1.2	Rehabilitation of doors with 20cm mesh on the top of the door for lighting. Door size (80cm * 1.8m) with oil painting of all doors both sides	No	5		
2	Plastering				
2.1	Rehab of Internal Plastering for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	20		
3	Painting				
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	120		
4	Sing post				
4.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Subag Girls Basic school Latrines

Project Location: Subag / Butana Locality

GPS: N 15° 17' 52.28" E 34° 48' 10.12"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors				
1.1	Rehabilitation of doors Doors size (90cm * 2m) with oil painting of all doors both sides	No	5		
2	Plastering				
2.1	Internal Plastering for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	15		
2.2	Built a toilet seat for latrines from bricks and plaster of neel as instruction of Engineer	No	5		
3	Painting				
3.1	Internal Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	92		
4	Sing post				
4.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Subag Boys Basic school Latrines
Project Location: Subag / Butana Locality
GPS: N 15° 17' 48.20" E 34° 48' 20.20"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors & floor				
1.1	Supply and install new doors with 20cm mesh on the top of the door for lighting. Door size (70cm * 2m) with oil painting of all doors both sides	No	1		
1.2	painting of Door size (90cm * 2m) in both sides	No	11		
2	Plastering				
2.1	Rehab of Internal Plastring for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	20		
3	Painting				
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	92		
4	Sing post				
4.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Subag Girls Secondary school Latrines

Project Location: Subag / Butana Locality

GPS: N 15° 18' 16.9" E 34° 48' 04.47"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate	SDG	Total amount SDG
1	Doors & floor					
1.1	Supply and install new doors with 20cm mesh on the top of the door for lighting. Door size (70cm * 2m) with oil painting of all doors both sides	No	1			
1.2	painting of Door size (90cm * 2m) in both sides	No	9			
2	Plastering					
2.1	Rehab of Internal Plastring for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	20			
3	Painting					
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	92			
4	Water Tank					
4.1	Supply and install water tank of 250 litter connected to ½ inch tapstand of brick forundation of 1m X 1m X 50cm hight with mortered cement/sand and plain concrete at the top of 10cm thickness, the masonry buliding filled with selected material and well compacted.	pcs	1			
5	Sing post					
5.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1			
Total cost SDG						



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747


Project name: Rehabilitation of Subag Boys Secondary school Latrines

Project Location: Subag / Butana Locality

GPS: N 15° 17' 57.98" E 34° 48' 11.36"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors & floor				
1.1	painting of Door size (90cm * 2m) in both sides	No	10		
2	Plastering				
2.1	Rehab of Internal Plastering for the latrines wall and partions. Cement mortar, mix 1:6 2cm thickness.	m2	20		
3	Painting				
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	92		
4	Water Tank				
4.1	Supply and install water tank of 250 litter connected to ½ inch tapstand of brick forundation of 1m X 1m X 50cm hight with mortered cement/sand and plain concrete at the top of 10cm thickness, the masonry buliding filled with selected material and well compacted.	pcs	1		
5	Sing post				
5.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					

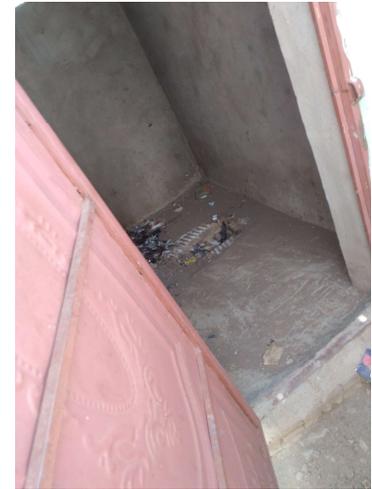

Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name:

Rehabilitation of Abu-Garad Basic school Latrines

Project Location:

Subag / Butana Locality

GPS:

N 15° 10' 45.57"

E 34° 42' 28.34"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate	SDG	Total amount SDG
1	Doors & floor					
1.1	painting of Door size (90cm * 2m) in both sides	No	4			
2	Painting					
2.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	92			
Total cost SDG						

Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Sorog Manana health center Latrines

Project Location: Subag / Butana Locality

GPS: N 14° 56' 50.87" E 35° 02' 59.28"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate	SDG	Total amount SDG
1	Doors & floor					
1.1	Rehabilitation of doors with 20cm mesh on the top of the door for lighting. Door size (70cm * 2m) with oil painting of all doors both sides	No	2			
2	Plain concrete					
2.1	Supply and cast plain concrete 1:3:6 of 5cm thickness for latrines floor , and finishing with neel	m2	6			
3	Painting					
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	58			
4	Water Tank					
4.1	Supply and install water tank of 250 litter connected to ½ inch tapstand of brick forundation of 1m X 1m X 50cm hight with mortered cement/sand and plain concrete at the top of 10cm thickness, the masonary buliding filled with selected material and well compacted.	pcs	1			
5	Sing post					
5.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1			
Total cost SDG						



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Alkhiari public Latrines - 1

Project Location: Subag / Butana Locality

GPS: N 15° 18' 06.73" E 34° 48' 06.10"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors & floor				
1.1	Rehabilitation of doors with 20cm mesh on the top of the door for lighting. Door size (70cm * 2m) with oil painting of all doors both sides	No	6		
2	Painting				
2.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	84		
3	Sing post				
3.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					



Mercy Corps - Gadarif State Office

SHF Project 2022

Project No: 33747

Project name: Rehabilitation of Alkhiari public Latrines - 2

Project Location: Subag / Butana Locality

GPS: N 15° 18' 07.19" E 34° 48' 05.95"

Bill of Quantities

Item	Description	Unit	Quantity	Unit Rate SDG	Total amount SDG
1	Doors & floor				
1.1	Supply and install new doors with 20cm mesh on the top of the door for lighting. Door size (70cm * 2m) with oil painting of all doors both sides	No	1		
1.2	painting of Door size (90cm * 2m) in both sides	No	3		
1.3	Supply and install new . Door size (70cm * 1.8m) from zinc and rectangular steel pipe 6X3 for showers	No	2		
3	Painting				
3.1	Painting for the latrines wall and partions with pomastic painting, with three coats.	m2	78		
4	Sing post				
4.1	Manufacturing and install of singpost plate size 1mX1.5m from steel sheet and fixed/welded to steel angle 1 inches . The cost include painting and writing cost (material which will provide by engineer)	pcs	1		
Total cost SDG					

