



**Plan International
Sudan**
Block 4, Building#325
Al Matar Area, Port Sudan
PO Box 528, SUDAN

Tel: +249 (0) 183 231 905 / 6
Fax: +249 (0) 183 227 041
Email: co.sudan@plan-international.org
www.plan-international.org

BILL OF QUANTITIES (BoQ)

One Stop Center – Quantities and Cost of Works

Tender Ref. No.: _____ Location: _____ Date: _____

Item No.	Description of Works	Unit	Qty	Unit Rate (SDG)	Amount (SDG)
1	SITE SETTING-OUT				
1	Site setting-out (layout of the works)	Lump sum	-	-	
2	EXCAVATION WORKS				
2-1	Excavation works for strip foundation	m (linear)	55		
Total Excavation Works (including Item 1)					
3	CONCRETE WORKS				
3-1	Supply and pour 10 cm blinding concrete layer for strip foundation, B-grade mix with 6 bags of cement, including materials and labor for steel fixing, formwork (carpentry) and pouring (batcher)	m (linear)	55		
3-3	Supply and pour lintel beam (20 x 20) for windows and doors as a tie beam for the building as a whole, including materials and labor for steel fixing and formwork (RING BEAM)	m (linear)	50		
3-6	Supply of materials and construction of roof using American galvanized sheets, with purlins and rafters ("marayin" and "sakakin"), with fiber insulation and "Sini Roof" material	Lump sum	-		
3-7	Supply and pour 10 cm concrete for floors	m ²	50		
Total Concrete, Reinforcement and Roofing Works					
4	MASONRY WORKS				



Plan International

Sudan

Block 4, Building#325
Al Matar Area, Port Sudan
PO Box 528, SUDAN

Tel: +249 (0) 183 231 905 / 6
Fax: +249 (0) 183 227 041
Email: co.sudan@plan-international.org
www.plan-international.org

Item No.	Description of Works	Unit	Qty	Unit Rate (SDG)	Amount (SDG)
4-1	Supply of red bricks and construction of masonry in one-and-a-half-brick thickness, to a height of 1 m below the grade beam and 3 m above the grade beam up to roof level, using blocks	m ²	220		
Total Masonry Works					
5	BACKFILLING WORKS				
5-1	Supply of fill materials, with leveling, watering and compaction, including labor and materials	Lump sum	-	-	
Total Backfilling Works					
6	PLASTERING WORKS				
6-1	Supply of materials and execution of plastering, internal and external, with 1:6 mix	m ²	450		
Total Plastering Works					
7	PAINTING WORKS				
7-1	Supply of materials and execution of painting, silk finish and "pomastic" (plastic) paint, internal and external	Lump sum	-	-	
Total Painting Works					
8	SUSPENDED CEILING WORKS				
8-1	Supply of suspended ceiling materials, including materials and labor	Lump sum	-	-	
Total Gypsum Board Works					
9	DOORS AND WINDOWS				
9-1	Fabrication and installation of doors and windows according to the required dimensions	Lump sum	-	-	
Total Doors and Windows Works					



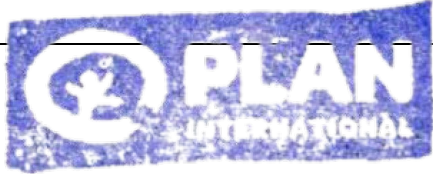
**Plan International
Sudan**

Block 4, Building#325
Al Matar Area, Port Sudan
PO Box 528, SUDAN

Tel: +249 (0) 183 231 905 / 6
Fax: +249 (0) 183 227 041
Email: co.sudan@plan-international.org
www.plan-international.org

Item No.	Description of Works	Unit	Qty	Unit Rate (SDG)	Amount (SDG)
10	PLUMBING WORKS				
10-1	Supply and installation of complete plumbing works for the bathrooms	Lump sum	-	-	
Total Plumbing Works					
11	FLOOR CERAMIC WORKS				
11-1	Supply and installation of porcelain ceramic for floors and bathrooms	Lump sum	-	-	
Total Porcelain Works					
12	AIR CONDITIONING AND COOLING WORKS				
12-1	Supply and installation of air conditioners	Lump sum	-	-	
Total Air Conditioning and Cooling Works					
13	ELECTRICAL WORKS				
13-1	Supply and installation of complete electrical works	Lump sum	-	-	
TOTAL COST					

Total amount in words: _____

Prepared by Name: _____ Title: _____ Signature: _____ Date: <u>19/10/2026</u>	 Submitted by (Bidder) Company: _____ Name / Title: _____ Signature & Stamp: _____ Date: _____
---	---